

CC系列扇形喷嘴

CC Series Flat fan spray nozzles

<http://www.csan.cn>



一般应用

- 高冲击力洗涤
- 洗涤碎砾石
- 水果与蔬菜洗涤
- 造纸机“稳纸框”喷雾
- 清除油渍


性能数据

喷流角度 (3巴时)	流量 大小	喷嘴入口接头					额定 喷孔径 (毫米)	流量(升/分)										喷流角度			尺寸			净重 (千克)
		1/8	1/4	3/8	1/2	3/4		1巴	2巴	3巴	4巴	5巴	6巴	7巴	10巴	1巴	3巴	7巴	A (毫米)	B 偏转 角度	C方形棒 材尺寸 (毫米)			
50°	5010	●					2.0	2.3	3.2	3.9	4.6	5.1	5.6	6.0	7.2	34°	50°	60°	31	60°	15.9	0.03		
	5025	●	●				2.8	5.7	8.1	9.9	11.4	12.7	14.0	15.1	18.0	42°	50°	59°	41.5	42°	19.1	0.09		
	5040	●	●				3.6	9.1	12.9	15.8	18.2	20	22	24	29	39°	50°	60°	47	45°	19.1	0.09		
	5060		●	●			4.8	13.7	19.3	24	27	31	33	36	43	42°	50°	53°	55	37°	25.4	0.14		
	50100		●	●			6.0	23	32	39	46	51	56	60	72	43°	50°	55°	72	40°	31.8	0.33		
	50125		●	●			6.7	28	40	49	57	64	70	75	90	38°	50°	59°	72	38°	31.8	0.31		
	50160		●	●			7.5	36	52	63	73	82	89	96	115	44°	50°	55°	72	37°	31.8	0.31		
	50200		●	●			8.3	46	64	79	91	102	112	121	144	46°	50°	53°	72	32°	31.8	0.31		
40°	4040		●	●			3.6	9.1	12.9	15.8	18.2	20	22	24	29	31°	40°	50°	60.5	35°	22.2	0.14		
	4050		●	●			4.0	11.4	16.1	19.7	23	25	28	30	36	31°	40°	49°	63.5	33°	25.4	0.20		
	4060		●	●			4.4	13.7	19.3	24	27	31	33	36	43	32°	40°	49°	72	33°	25.4	0.23		
	4070		●	●			5.2	16.0	23	28	32	36	39	42	50	32°	40°	49°	75.5	29°	25.4	0.26		
	4080		●	●			5.2	18.2	26	32	36	41	45	48	58	32°	40°	48°	77	26°	25.4	0.26		
	4090		●	●			5.6	21	29	36	41	46	50	54	65	34°	40°	44°	77	28°	25.4	0.23		
	40100		●	●			6.0	23	32	39	46	51	56	60	72	35°	40°	44°	86.5	28°	25.4	0.26		
	3504	●					1.2	0.91	1.3	1.6	1.8	2.0	2.2	2.4	2.9	20°	35°	41°	23	40°	11.1	0.01		
35°	3510		●				2.0	2.3	3.2	3.9	4.6	5.1	5.6	6.0	7.2	18°	35°	39°	36.5	36°	15.9	0.06		
	3520		●	●			2.8	4.6	6.4	7.9	9.1	10.2	11.2	12.1	14.4	24°	35°	40°	42	30°	19.1	0.06		
	3525		●	●			2.8	5.7	8.1	9.9	11.4	12.7	14.0	15.1	18.0	24°	35°	39°	49	28°	19.1	0.09		
	3530		●	●			3.2	6.8	9.7	11.8	13.7	15.3	16.7	18.1	22	26°	35°	41°	52.5	28°	19.1	0.09		
	3540		●	●			3.6	9.1	12.9	15.8	18.2	20	22	24	29	28°	35°	38°	58	26°	22.2	0.11		
	3550		●	●			4.0	11.4	16.1	19.7	23	25	28	30	36	31°	35°	38°	63.5	23°	22.2	0.14		
	3560		●	●			4.4	13.7	19.3	24	27	31	33	36	43	29°	35°	39°	73	27°	25.4	0.23		
	3580		●	●			5.2	18.2	26	32	36	41	45	48	58	26°	35°	40°	81	24°	25.4	0.26		
	35100		●	●			6.0	23	32	39	46	51	56	60	72	26°	35°	40°	89	19°	25.4	0.26		
	35160		●	●			7.5	36	52	63	73	82	89	96	115	26°	35°	40°	114	23°	31.8	0.57		
	35200		●	●			8.3	46	64	79	91	102	112	121	144	25°	35°	40°	122	22°	31.8	0.57		
	25°	2540		●	●			3.6	9.1	12.9	15.8	18.2	20	22	24	29	15°	25°	34°	65	25°	19.1	0.11	
1510			●	●			2.0	2.3	3.2	3.9	4.6	5.1	5.6	6.0	7.2		15°	23°	47.5	22°	15.9	0.06		
15°	1520		●	●			2.8	4.6	6.4	7.9	9.1	10.2	11.2	12.1	14.4		15°	19°	54	19°	15.9	0.06		
	1530		●	●			3.2	6.8	9.7	11.8	13.7	15.3	16.7	18.1	22	6°	15°	24°	72	25°	19.1	0.11		
	1540		●	●			3.6	9.1	12.9	15.8	18.2	20	22	24	29	8°	15°	21°	92	18°	22.2	0.23		
	1550		●	●			4.4	11.4	16.1	19.7	23	25	28	30	36	9°	15°	20°	90.5	15°	22.2	0.17		
	1560		●	●			4.8	13.7	19.3	24	27	31	33	36	43	10°	15°	19°	125	14°	25.4	0.34		
	1580		●	●			5.2	18.2	26	32	36	41	45	48	58	11°	15°	18°	130	14°	25.4	0.34		
	15100		●	●			6.0	23	32	39	46	51	56	60	72	11°	15°	18°	137	14°	25.4	0.40		
	15200		●	●			8.3	46	64	79	91	102	112	121	144	12°	15°	18°	191	14°	31.8	0.91		

V



1/8英寸-3/4英寸NPT或BSPT (外)



尺寸

设计特点


V 系列通用窄角喷嘴的特点是能产生具有高冲击力的窄角扇形喷嘴。这种喷嘴产生的喷雾分布均匀，液滴大小中等。

V 系列通用窄角喷嘴带有外管道螺纹接头整体设计。大而流畅的通道最大程度地减少了阻塞现象。经精细工艺加工而成的导流平面提供了均匀的、高冲击力喷雾形状。

订购信息

V - 3/8 - SS - 5060

↓ ↓ ↓ ↓
喷嘴 入口 材料 流量
型号 接头 代码 大小
尺寸



一般应用

- 喷流空气净化器板
- 冷却传送带
- 胶片冲洗
- 网或毛毯低压清洗
- 水帘

性能数据



空气和蒸气

流量大小	额定喷孔孔径(毫米)	空气流量(升/分钟)				蒸气流量(升/分钟)				喷嘴150毫米处的覆盖范围(毫米)	
		0.7巴	1.5巴	3巴	3.5巴	0.7巴	1.5巴	3巴	3.5巴	0.7巴	1.5巴
0.50	0.61	4.5	6.4	10.5	11.6	0.16	0.23	0.37	0.41	51	127
0.75	0.71	6.2	9.1	14.7	16.7	0.23	0.33	0.53	0.6	64	140
1	0.84	9.6	13.7	22	25	0.34	0.49	0.80	0.90	76	152
1.5	1.04	15.3	22	36	40	0.54	0.78	1.3	1.5	89	165
2	1.17	19.3	28	45	51	0.68	1.0	1.6	1.8	102	190
2.5	1.32	27	37	60	71	0.95	1.3	2.1	2.5	102	190
3	1.45	31	47	77	85	1.1	1.7	2.7	3.0	127	203
4	1.65	40	57	85	108	1.4	2.0	3.1	3.9	127	228
5	1.85	54	76	124	139	1.9	2.7	4.5	5.0	152	267
7.5	2.31	79	117	189	210	2.9	4.2	6.8	7.6	152	267
10	2.64	110	159	255	290	3.9	5.7	9.2	10.4	178	279
15	3.28	181	260	420	475	6.5	9.3	15.0	17.1	178	305
20	3.76	225	325	520	590	8.0	11.6	18.8	21	216	368
30	4.57	320	465	760	850	11.6	16.8	27	30	216	394

W



1/8英寸-1英寸NPT或BSPT(外)

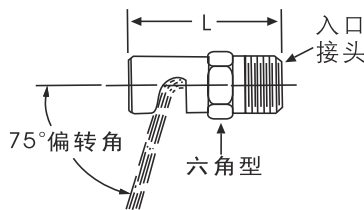

设计特点

W 系列通用广角喷嘴的特点是能产生中等冲击力的广角扇形喷嘴形状，喷出的液体分布均匀，液滴大小中等。圆形喷孔、大而通畅的流道把阻塞现象减少到最低程度。

W 系列通用广角喷嘴还适用于空气与蒸汽的喷流。所有的喷嘴都提供精密加工的导流面，以便可靠、准确地控制偏转角和喷雾角度。

W 系列通用广角喷嘴是用坚固的棒材精细制造的，具有外管道螺纹入口接头。

喷嘴尺寸

喷嘴型号		
喷嘴尺寸	六角型(毫米)	喷嘴长度(毫米)
1/8	14.3	31
1/4	14.3	34

性能数据

液体

喷嘴入口接头					流量大小	额定喷嘴孔径(毫米)	空气流量(升/分钟)								喷流角度			
1/8	1/4	1/2	3/4	1			0.2巴	0.3巴	0.5巴	0.7巴	1巴	1.5巴	2巴	3巴	4巴	0.5巴	1.5巴	4巴
●					0.25	0.41				0.11	0.14	0.16	0.20	0.23		83°	117°	
●					0.50	0.61				0.23	0.28	0.32	0.39	0.46		89°	122°	
●					0.75	0.71			0.29	0.34	0.42	0.48	0.59	0.68		106°	125°	
●					1	0.84			0.38	0.46	0.56	0.64	0.79	0.91		109°	128°	
●					1.5	1.0		0.48	0.57	0.68	0.84	0.97	1.2	1.4	73°	108°	125°	
●	●				2	1.2		0.64	0.76	0.91	1.1	1.3	1.6	1.8	83°	113°	129°	
●	●				2.5	1.3		0.62	0.81	0.95	1.1	1.4	1.6	2.0	2.3	98°	122°	133°
●	●				3	1.4		0.75	0.97	1.1	1.4	1.7	1.9	2.4	2.7	86°	112°	126°
●					4	1.7		1.0	1.3	1.5	1.8	2.2	2.6	3.2	3.6	97°	123°	132°
●	●				5	1.9	1.0	1.2	1.6	1.9	2.3	2.8	3.2	3.9	4.6	114°	128°	142°
●	●				7.5	2.3	1.5	1.9	2.4	2.9	3.4	4.2	4.8	5.9	6.8	101°	119°	134°
●	●				10	2.6	2.0	2.5	3.2	3.8	4.6	5.6	6.4	7.9	9.1	115°	133°	145°
●	●				12	2.9	2.4	3.0	3.9	4.6	5.5	6.7	7.7	9.5	10.9	128°	139°	153°
●	●				15	3.3	3.1	3.7	4.8	5.7	6.8	8.4	9.7	11.8	13.7	98°	113°	123°
●	●				18	3.6	3.7	4.5	5.8	6.9	8.2	10.0	11.6	14.2	16.4	106°	120°	131°
●	●				20	3.8	4.1	5.0	6.4	7.6	9.1	11.2	12.9	15.8	18.2	110°	122°	133°
	●				22	4.0	4.5	5.5	7.1	8.4	10.0	12.3	14.2	17.4	20	113°	125°	136°
	●				24	4.1	4.9	6.0	7.7	9.2	10.9	13.4	15.5	18.9	22	115°	131°	144°
	●				27	4.4	5.5	6.7	8.7	10.3	12.3	15.1	17.4	21	25	119°	135°	148°
	●				30	4.6	6.1	7.5	9.7	11.4	13.7	16.7	19.3	24	27	100°	110°	121°
	●				35	5.0	7.1	8.7	11.3	13.3	16.0	19.5	23	28	32	105°	118°	128°
	●	●			40	5.3	8.2	10.0	12.9	15.3	18.2	22	26	32	36	111°	126°	136°
	●				45	5.6	9.2	11.2	14.5	17.2	21	25	29	36	41	115°	130°	140°
		●			50	6.0	10.2	12.5	16.1	19.1	23	28	32	39	46	117°	131°	140°
		●			60	6.5	12.2	15.0	19.3	23	27	33	39	47	55	120°	134°	142°
		●			70	7.1	14.3	17.5	23	27	32	39	45	55	64	123°	137°	146°
		●			80	7.5	16.3	20	26	31	36	45	52	63	73	127°	138°	149°
			●		90	8.0	18.3	22	29	34	41	50	58	71	82	120°	133°	140°
			●		100	8.4	20	25	32	38	46	56	64	79	91	123°	136°	145°
			●		110	8.8	22	27	35	42	50	61	71	87	100	125°	138°	148°
			●		120	9.3	24	30	39	46	55	67	77	95	109	129°	143°	150°
			●		140	10.3	29	35	45	53	64	78	90	111	128	118°	127°	135°
			●		160	11.1	33	40	52	61	73	89	103	126	146	121°	130°	137°
			●		180	11.5	37	45	58	69	82	100	116	142	164	124°	133°	139°
			●		210	12.3	43	52	68	80	96	117	135	166	191	128°	139°	145°
				●	300	14.7	61	75	97	114	137	167	193	235	275	110°	128°	135°
				●	450	17.9	92	112	145	172	205	250	290	355	410	118°	132°	138°

订购信息

W - 1/8 - SS - 0.50				备注: BRASS-黄铜	
↓	↓	↓	↓	SS-303不锈钢	
喷嘴	入口	材料	流量	316SS-316不锈钢	
型号	接头	代码	大小	PVC-聚氯乙烯	
	尺寸			PP-聚丙烯	